

Technical Specifications

MEJET 3200UV		
Printheads	Ricoh GEN5.	
Number of Printhead	Max 7pcs print heads	
Print mode	Bi-direction	
Speed	300x1200dpi - 4pass - 38m²/hr 300x1800dpi - 6pass - 28,5m²/hr 300x2400dpi - 8pass - 19m²/hr (backlit modu)	
Max. Print Width	3.2m	
Print Media	Materials	Self adhesive vinyl, fabrics, flex banner, backlit film, wall paper etc.
	Roller OD	Max 250mm
	Roller Weight	Max 100kg
Take up - Feeding system	Double power automatic taking up system / single roller feeding Vinyl printing feeding system Flexible pvc feeding and take up system(optional)	
Ink Color	(K. C. M, Y, W1, W2) (LC, LM are optional colors)	
Ink Type	LED UV	
RIP Software	UnitedFancy (OEM by Printfactory)	
Data transmission interface	USB 3.0	
Power	Machine	2800W
	Water Circulation	300W
Machine Weight	1000kg	
Machine Size	4789mm x 1248mm x 1407mm	
Packing size/weight	5000mm x 1360mm x 1550mm / 1300kg	
Computer Configuration	Operation	Windows 7/8/10 (64bit)
	CPU	i5 or more
	Graphics Card	Independent 2gb
	Memory	8GB
	Hard Disk	1TB
	USB	USB 3.0
Power requirement	220VAC(+10%) Single Phase, 50/60Hz, 6A	
Working Environment	<ul style="list-style-type: none">• Constant humidity of 40% ~ 70% RH• Clean and dust-free• Sheltered from sunlight• In a good ventilating condition• Rated voltage of 220V and the voltage between neutral and ground should be below the value of 3V	



MEJET 3200 UV




Add value your bussiness with high quality machine,
Fujifilm’s high-standard Uvijet Inks, technical service
support above industrial standards and expert
technical teams.



INDUSTRIAL UV ROLL-TO-ROLL PRINTER

- 1 Equipped with Toshiba CE4M print heads, featuring 8 levels grey scale, mini 5pl ink drop size, with a high resolution. 160 billion ink jetting times per nozzles.
- 2 Strong machine body, support 24 hours* 7 days printing
- 3 Able to print colors only/white+color/ color+white+color/color+white
- 4 Print heads with water heating system, to keep constant temperature for the heads
- 5 Seperate ink purging system, using solenoid valve system. When purging single color, other colors will be not interfered
- 6 4pcs gradienter on the machine feet, to adjust the flatness of the machine, get the better printing quality.
- 7 Ink curing system: Japan made USHIO fan cooling LED lamps, 10.000 working hours. One year warranty.

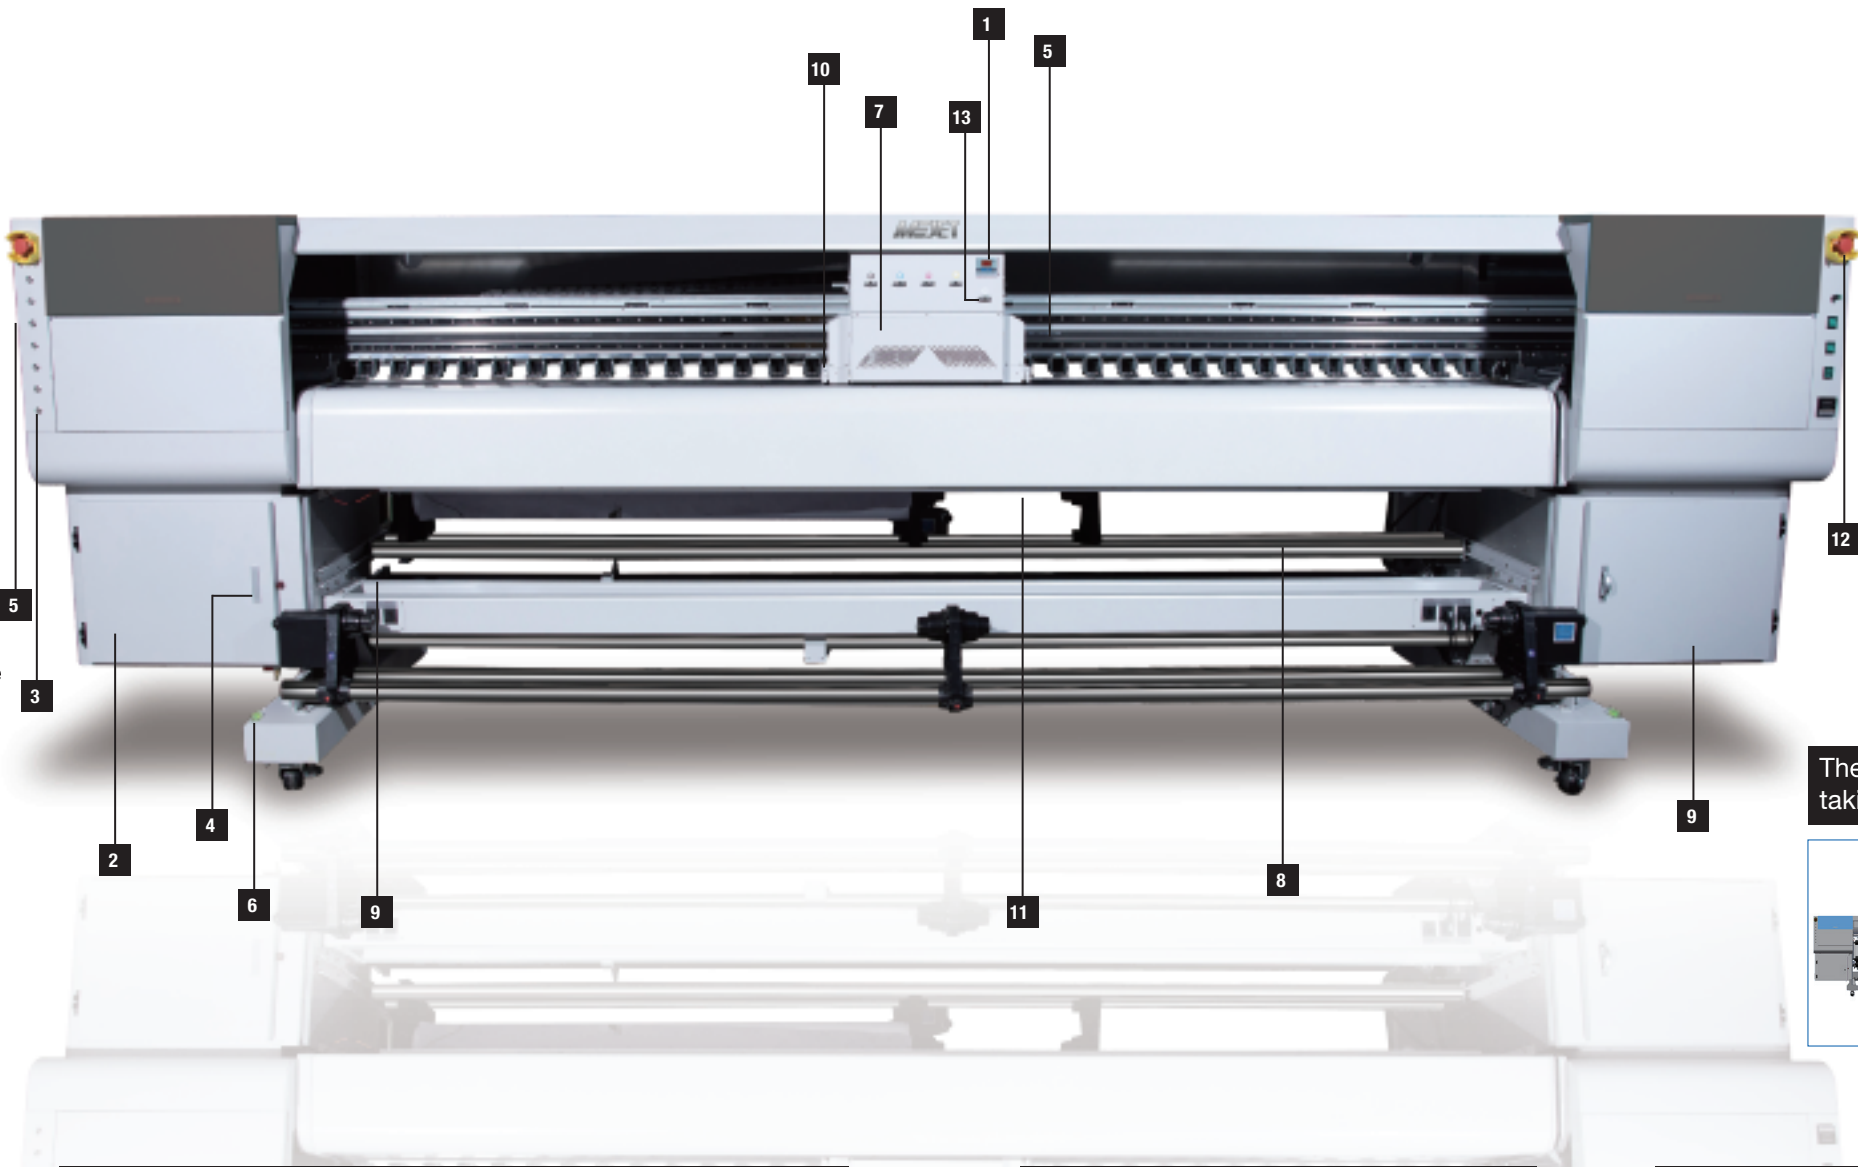

- 8 2 kinds feeding system
Double rollers automatic feeding system;
Vinyl printing feeding system, able to print 2 rollers vinyl at one time
- 9 Using negative pressure tank for ink system, to keep the stable negative pressure
- 10 Print head Anti-collision system, prevent printhead damaging from accidents caused by human error or material deformation
- 11 Light box in front of the machine to check backlit printing quality
- 12 Two emergency stop at both sides to stop printers in any emergency conditions
- 13 Drawer ink tank with alarm system

The other version : with flexible PVC feeding and taking up system. (Depends on client's request).



Uygulamalar

